

JCPT(DC)

自行走越野剪叉式高空作业平台 (直流电机驱动)



JCPT1218DC

JCPT1418DC



安全工作载荷	454kg	363kg
延伸平台安全工作载荷	136kg	136kg
最大工作人数	4	3
A 最大工作高度	12.00m	14.30m
B 最大平台高度	10.00m	12.30m
C 整机长度(带支腿/不带支腿)	3.84m/3.19m	3.84m/3.19m
D 整机宽度	1.76m	1.76m
整机高度(围栏未折叠)	2.59m	2.74m
E 整机高度(围栏折叠)	1.82m	1.97m
工作平台尺寸(长×宽 F)	2.88m×1.52m	2.88m×1.52m
G 平台延伸尺寸	1.43m	1.43m
最小离地间隙	0.24m	0.24m
H 轴距	2.29m	2.29m
最小转弯半径(内轮/外轮)	2.15m/4.85m	2.15m/4.85m
驱动电机	2×32VAC/3.3kw	2×32VAC/3.3kw
起升电机	48V/7.8kw	48V/7.8kw
机器行驶速度(收拢状态)	6km/h	6km/h
机器行驶速度(起升状态)	0.48km/h	0.48km/h
上升/下降速度	40/46sec	45/46sec
最大爬坡能力	40%	40%
工作最大允许角度(美标)	2°/3°	2°/3°
工作最大允许角度(欧标)	1.5°/3°	1.5°/3°
蓄电池	8×6V/315Ah	8×6V/315Ah
充电器	48V/25A	48V/25A
液压油箱	71L	71L
轮胎	26×12-16.5	26×12-16.5
整机重量(带支腿/不带支腿)	4400kg/4135kg	5150kg/5150kg



浮动桥




安全检修支架



折叠围栏



紧急下降系统

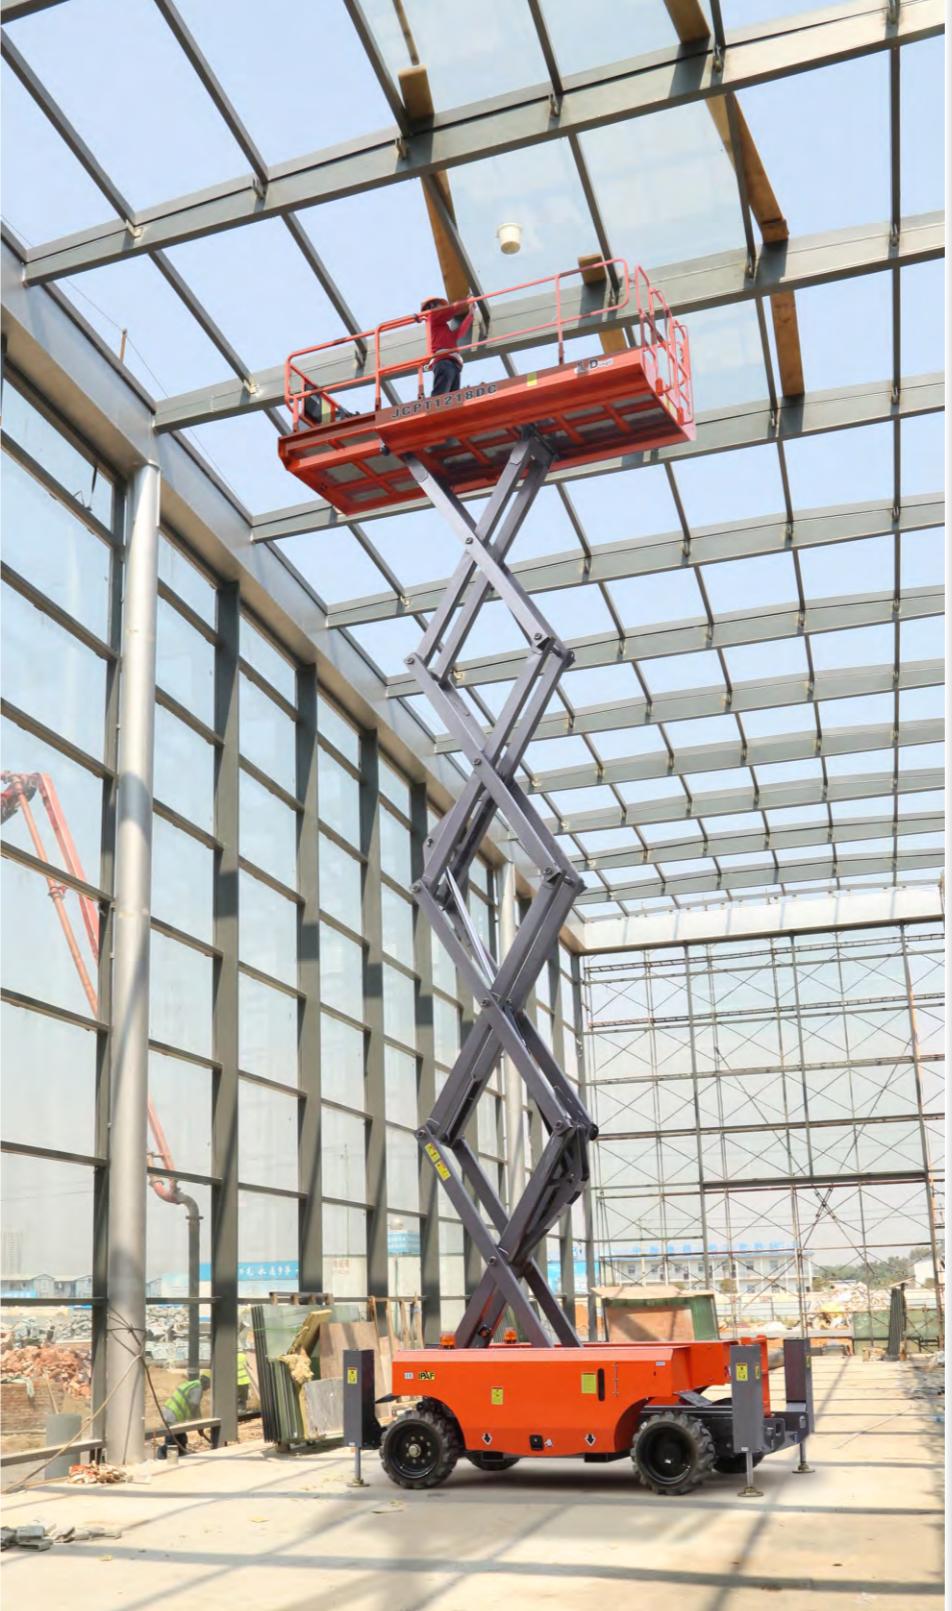

自动调平支腿



延伸平台



大容量电池



爬坡力

标准配置

- 比例控制
- 平台自锁门
- 全行程行走
- 发泡轮胎
- 液压高压水泵
- 平台工作灯
- 连接到平台的AC电源
- 自动刹车系统
- 紧急下降系统
- 紧急停止按钮
- 油管防爆系统
- 故障诊断系统
- 倾斜保护系统
- 动作蜂鸣
- 喇叭
- 安全检修支撑杆
- 工作时间表
- 折叠围栏
- 延伸平台
- 频闪灯
- 液压油散热器
- 摆动桥底盘
- 标准运输叉车孔

